


Anchor Shackles

Working Load Limits (Tons)	Nominal Shackle Size (in.)	Inside Length	Inside Width at Pin	Weight Pounds Each 209
† 1/3	3/16	7/8	3/8	.05
1/2	1/4	1-1/8	1/2	.12
3/4	5/16	1-7/32	17/32	.19
1	3/8	1-7/16	21/32	.31
1-1/2	7/16	1-11/16	23/32	.38
2	1/2	1-7/8	13/16	.63
3-1/4	5/8	2-3/8	1-1/16	1.38
4-3/4	3/4	2-13/16	1-1/4	2.25
6-1/2	7/8	3-5/16	1-7/16	3.38
8-1/2	1	3-3/4	1-11/16	5.32
9-1/2	1-1/8	4-1/4	1-13/16	6.81
12	1-1/4	4-11/16	2-1/32	9.50
13-1/2	1-3/8	5-3/16	2-1/4	13.25
17	1-1/2	5-3/4	2-3/8	17.70
25	1-3/4	7	2-7/8	30.38
35	2	7-3/4	3-1/4	45.00
† 55	2-1/2	10-1/2	4-1/8	85.75

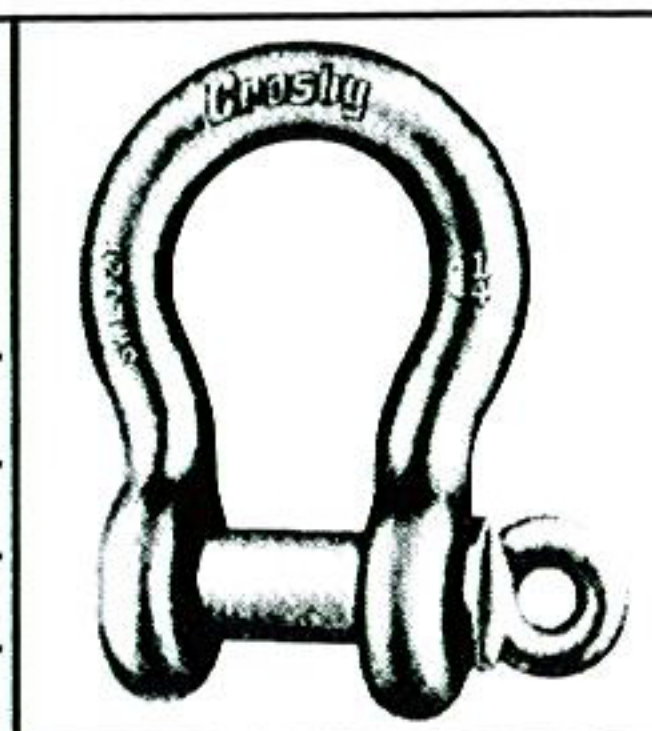

NOTE: † Furnished in screw pin only.

* Maximum Proof Load is 2.2 times the Working Load Limit or as designated. Minimum Ultimate Strength is 6 times the Working Load Limit.